

STURDY FOOTTM KITS



DISTRIBUTED BY CLEARLAKE SUPPLY

847.686.2890

FEATURES

- Vulcanized Recycled Rubber
- Suitable for most Rooftop Material
- UV Resistant
- Noise/Vibration Dampening
- Highly Resistant to Freeze/Thaw
- Indented hand hold design/easy transportation
- Includes Hardware for mounting to mini split units

INDEPENDENT LAB TESTING

- Ozone Exposure ASTM D1149-18
- Heat Aging ASTM D573-2019
- Hardness (Durometer Shore A) ASTM D2240-2021
- Compressive Strength ASTM D395-2018
- Tensile Testing ASTM D412-2016

APPLICATIONS

- HVAC Unit Mounting
- Solar Racking
- HVAC Ducting
- HVAC System Support
- Pipe/Conduit Support
- Cable Tray Systems
- Roof Walkway Systems

FINISHES

- Pre-Galvanized Steel Strut
- Other special order finishes available

MODEL	STRUT LENGTH	BLOCK LENGTH	HEIGHT	WIDTH	LOAD CAPACITY*	WEIGHT
-------	--------------	--------------	--------	-------	----------------	--------

<input type="checkbox"/> T316V-KIT	16"	16"	4"	6"	1,500LBS	17 LBS
------------------------------------	-----	-----	----	----	----------	--------



KIT CONTAINS (2) T316V AND MOUNTING HARDWARE

<input type="checkbox"/> T318V-KIT	18"	18"	4"	6"		
------------------------------------	-----	-----	----	----	--	--

KIT CONTAINS (2) T318V AND MOUNTING HARDWARE

<input type="checkbox"/> T324V-KIT	22.5"	23.5"	4"	6"	2,000LBS	23 LBS
------------------------------------	-------	-------	----	----	----------	--------

KIT CONTAINS (2) T324V AND MOUNTING HARDWARE

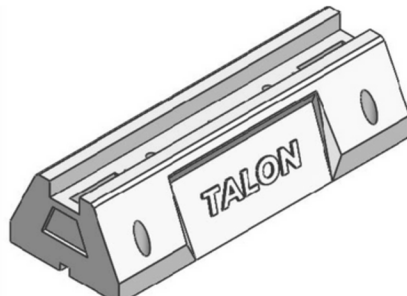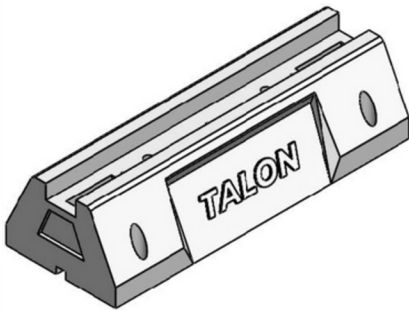

*Uniform block load capacity only. Always consult engineer for substrate load capacity. Mounting holes not rated to hold load capacity.



www.talonroofingproducts.com



info@talonroofingproducts.com

