

**STURDY FOOT™****TALON**  
ROOFING PRODUCTS

DISTRIBUTED BY CLEARLAKE SUPPLY

847.686.2890

**FEATURES**

- Vulcanized Recycled Rubber
- Suitable for most Rooftop Material
- UV Resistant
- Noise/Vibration Dampening
- Highly Resistant to Freeze/Thaw
- Reflector for hi visibility
- Indented hand hold design/easy transportation

**INDEPENDENT LAB TESTING**

- Ozone Exposure ASTM D1149-18
- Heat Aging ASTM D573-2019
- Hardness (Durometer Shore A) ASTM D2240-2021
- Compressive Strength ASTM D395-2018
- Tensile Testing ASTM D412-2016

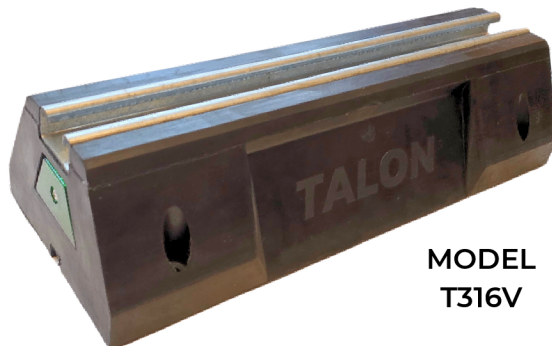
**APPLICATIONS**

- HVAC Unit Mounting
- Solar Racking
- HVAC Ducting
- HVAC System Support
- Pipe/Conduit Support
- Cable Tray Systems
- Roof Walkway Systems

**FINISHES**

- Pre-Galvanized Steel Strut
- Other special order finishes available

	MODEL	STRUT LENGTH	BLOCK LENGTH	HEIGHT	WIDTH	LOAD CAPACITY*	WEIGHT
<input type="checkbox"/>	<b>T310V</b>	10"	10"	4"	6"	**	**
<input type="checkbox"/>	<b>T316V</b>	16"	16"	4"	6"	1,500LBS	7.875LBS
<input type="checkbox"/>	<b>T318V</b>	18"	18"	4"	6"	**	**
<input type="checkbox"/>	<b>T324V</b>	22.5"	23.5"	4"	6"	2,000LBS	11.125LBS
<input type="checkbox"/>	<b>T330V</b>	28.5"	29.5"	4"	6"	**	**
<input type="checkbox"/>	<b>T340V</b>	38.5"	39.5"	4"	6"	**	**

MODEL  
T316V

\*Uniform block load capacity only. Always consult engineer for substrate load capacity. Mounting holes not rated to hold load capacity. \*\* currently in testing. Contact your rep for updated load ratings.

